

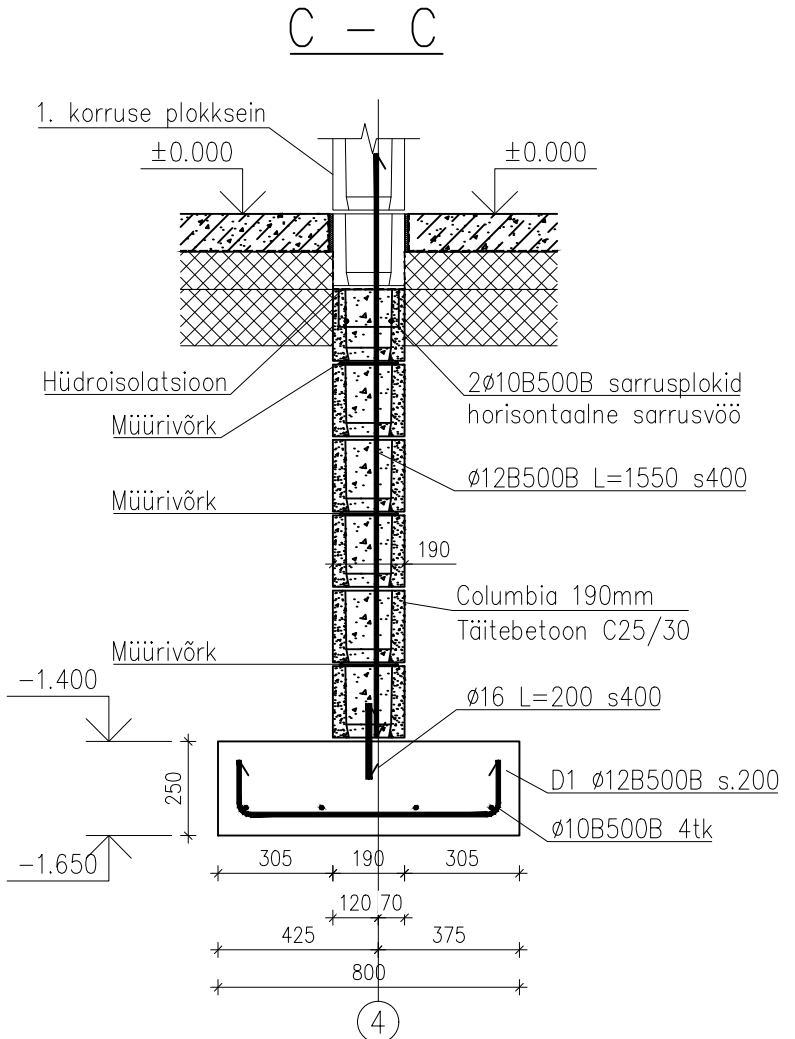
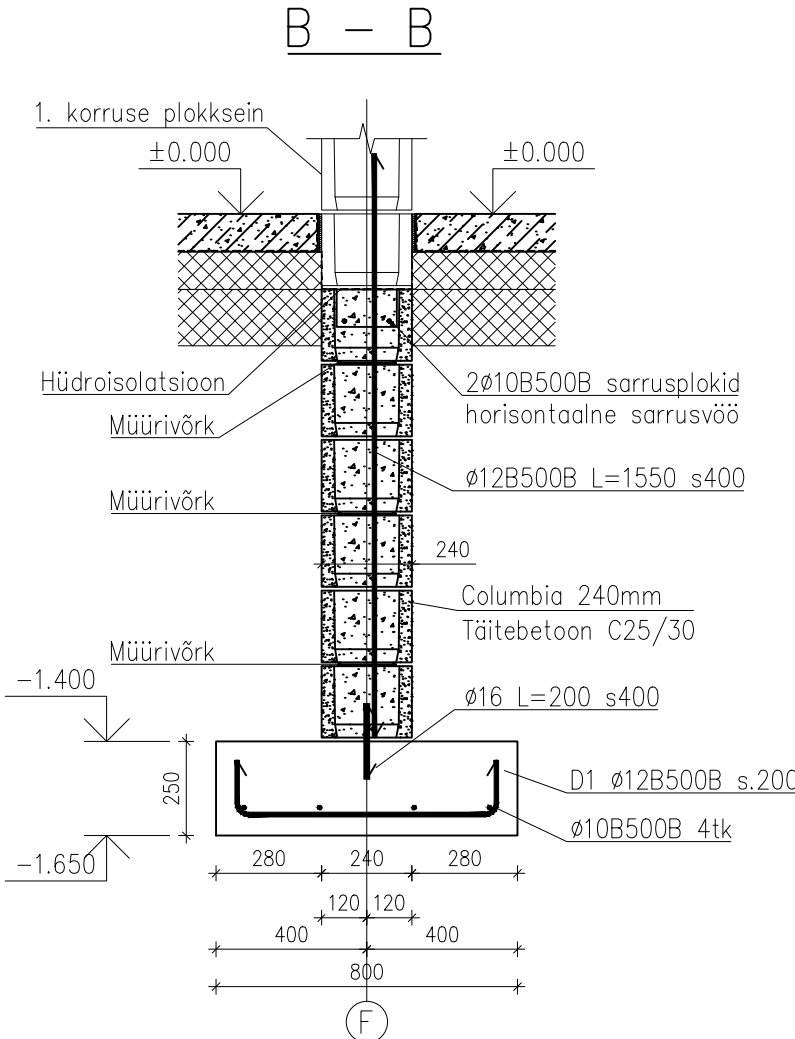


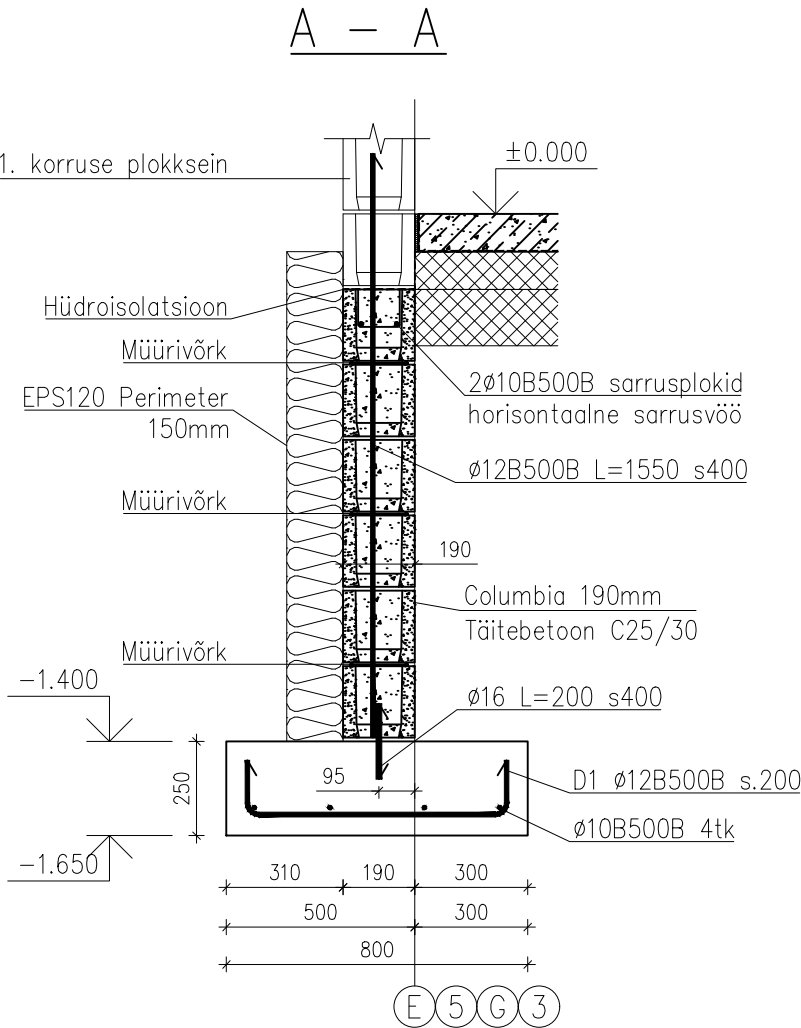

ARMATUURI SPETSIFIKATSIOON

Pos.	Klass	Diam. mm	Arv tk	Pikkus mm	Mass kg	a mm	b mm	c mm	d mm	e mm	u	v	x mm	y mm
D1	B500B	12	300	1000	0.88	150	700	150						
D2	B500B	10	143	600	0.37	150	300	150						

Tabelis on toodud painutatud varraste gabariitmõõdud



Painutatud vardad
Ø12B500B – 264 kg
Ø10B500B – 52.9 kg
Pulgad taldmiku ja seina vahel
Ø16B500B L=200 – 220tk

Pikivardad:
Taldmikus Ø10B500B – ~360jm
Vundamendi seinas Ø12B500B – ~300jm
Vundamendi seina sarrusvõös Ø10B500B – ~160jm

Betoon vundamendi taldmikus
Elumaja – C20/25 – 11.9 m³
Kõrvalhoone – C20/25 – 2.9 m³
Betoon postvundamentides – 1.3 m³