


[illegible]

HÖÖVELDATUS VERTIKAALNE VÖDERLAUD, 22MM
 HORIZONTAALNE ROOVITUS, 22MM
 PUIT KARKASS 45X95

2663.2
 2200

BETONKIVI 60MM
 LIIVAST TASANDUSKIHT
 TIHENDATUD KILLUSTIKALUS 150MM
 TIHENDATUD LIIVA TAIDE
 TIHENDATUD JA LÕODITUD LIIVALUS (LÕODUSLIK)

Technical drawing of a window frame cross-section. The drawing shows a blue window frame (100) with a black arrow pointing to it. The frame is set into a wall. The wall structure includes a red brick layer, a white insulation layer (8MM), and a blue concrete layer (12MM). The window frame is labeled with dimensions: 100, 0,00 (50,25ABS). The insulation layer is labeled 8MM. The concrete layer is labeled 12MM. The window frame is labeled 8MM - 150X150.

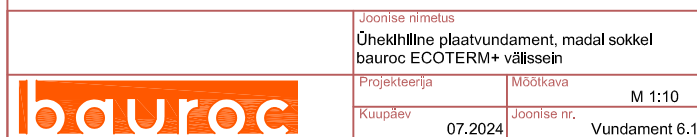

MÄRKUS: ÄRVESTADA
PAIGALUSJUHENDITEGA JA HEA
EHITUSTAVAGA.
SÕLMEL NÄIDATUD ARMATUUR
KANDA ÜLE KOGU VUNDAMENDI